

ResCom (CMC) Exa-CLAD / HMR / PSS CEMENT SHEATHING

90/90/90 EXTERIOR BOUNDARY WALL SYSTEM

Internationally Compliant to ISO: 8336 Fibre Cement Sheet Standards CERT#PTS100108

Compliant for use in Class 1 & 10a Timber Framed Buildings

Compliant with NCC Vol.1 & Vol.2 A2.0(1)

Compliant with NCC Vol.1 Section C Fire Resistance

Compliant with AS:1530.1 (Group 1) & AS:1530.4 FRL Tested Systems

Compliant with NCC Vol.1 Schedule 5 & Schedule 6

Compliant with NCC Vol.2 Section 3.5.4 for Timber & Composite Wall Cladding

Compliant with NCC Vol.2 Section 3.7.1 Fire Properties for Materials & Construction

Compliant with NCC Vol.2 Section 3.7.2 Fire Separation


Compliant with NCC Vol.2 Section 3.10.5 Bushfire Areas to BAL-FZ

Compliant for use when Structure and Framing is in accordance with AS:1684 & AS1720 or NASH

Weather Resistance to be in accordance with NCC P2.2.2

Timber Frame :

90mm x 45mm (M12)

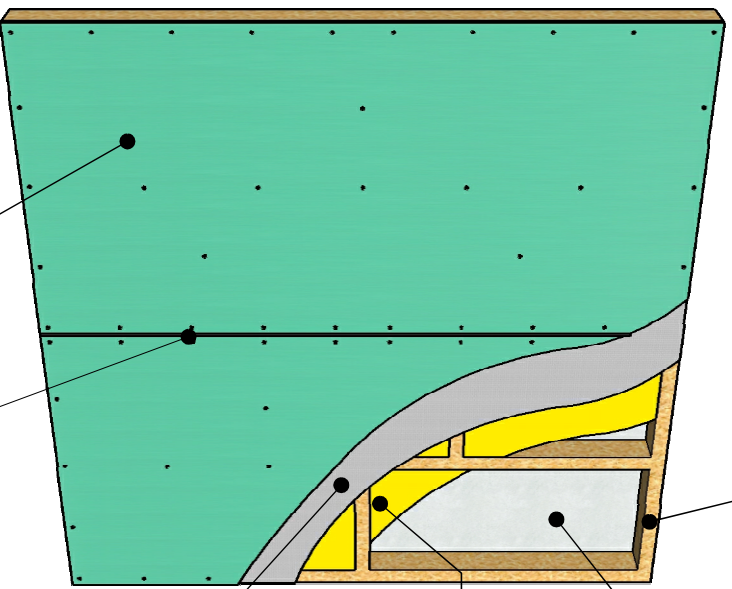

Internal Lining:
10mm Standard Plasterboard

Cavity Insulation:
90mm of R2.5 Glasswool Insulation

Vapour Barrier Wrap Paper

Fire rated caulking compound

Exterior Lining / Cladding:
1 x Layer of 16mm ResCom Cement Board

